



Shown in Gray





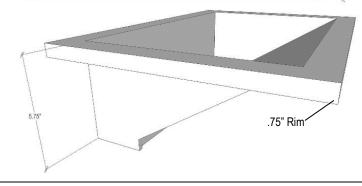

inkasink

AC01DI

Henry Concrete Rectangle Sloped with Grate Recess Sink

DETAILS

Installation Type: Drop-in Material: Glass Fiber Reinforced Concrete OD: 21" x 15" x 5.75" ID: 18" x 12" Uses standard 1.5" drain; No Overflow

Dimensions are approximate

Each sink is hand-crafted; no two sinks will be the same. All concrete sinks will have unique markings, such as air bubbles, texture and variations that are inherent characteristics of the handmade process.

See our <u>"Artisan Concrete Fact Sheet"</u> for additional details.

AVAILABLE FINISHES

G	Gray
BLK	Black

AVAILABLE DRAINS

D004	Grid Strainer
------	---------------

AVAILABLE GRATES

GC001	So UI
GC002	Sp B(

Square Bars Grate (PS, SS, PB, UB, BCS *satin black*) Spoke Grate (PS, SS, PB, UB, BCS *satin black*)

NOTE: Order grate as a separate line item. Grate should be ordered at the same time as sink – grates are not sold as stand-alone items.

INSTALLATION

Drain should be installed first. A conversion kit for drain installation is provided with each sink with 1.5" drain opening. DROP-IN: Cut opening large enough for the sink to be "dropped in" to

countertop. Use silicone adhesive to adhere sink to countertop. Clean any excess silicone from sink surface to avoid discoloration. Clips or other installation method must be provided by the fabricator/installer.

CARE

Concrete sinks are crafted from glass fiber reinforced concrete (GFRC). Linkasink hand-etches, then seals each sink with a 7-step impregnating sealer. Use Windex® with Vinegar for cleaning as needed. The sink should not be exposed to harsh or acidic chemicals, cleaners, or scrubbers.

WARRANTY

Linkasink warranties our product to be free from manufacturing defect for the life of the product. Warranty does not cover improper care, neglect, abuse or normal wear-and-tear.

DIMENSIONS WILL VARY

DO NOT use this sheet as a guide for countertop cuts. Due to the handmade nature of each product, templates are not provided.