

AC05

Oliver

DETAILS

Installation Type: AC05DI (Drop-In) or AC05UM (Undermount)

Glass Fiber Reinforced Concrete

(Each sink is Hand Crafted; no two sinks will be the same.)

No Overflow

AVAILABLE FINISHES

G	Gray
BLK	Black

AVAILABLE DRAINS

D004	Grid Strainer
-------------	---------------

AVAILABLE GRATES

GM001	Filigree Grate (PS, SS, PB, UB, BCS <i>satin black</i> , BCP <i>polished black</i>)
GM003	Spoke Grate (PS, SS, PB, UB, BCS <i>satin black</i> , BCP <i>polished black</i>)
GM004	Hawaiian Quilt (PS, SS, PB, UB, BCS <i>satin black</i> , BCP <i>polished black</i>)
GM007	Square Bars Grate (PS, SS, PB, UB, BCS <i>satin black</i> , BCP <i>polished black</i>)

INSTALLATION

Drain should be installed first. A conversion kit for drain installation is provided with each sink with 1.5" drain opening. **DROP-IN:** Cut opening large enough for the sink to be "dropped in" to countertop. **UNDERMOUNT:** Cuts in countertop are up to the discretion of the installer. Clips or other installation method must be provided by the fabricator/installer.



Use 100% silicone to adhere sink to countertop. Clean any excess silicone from sink surface.

CARE

Concrete sinks are crafted from glass fiber reinforced concrete (GFRC). Linkasink hand-etches then seals each sink with a 7 Step impregnating sealer. Use Windex® with Vinegar for cleaning as needed. The sink should not be exposed to harsh or acidic chemicals, cleaners or scrubbers.

WARRANTY

Linkasink warranties our product to be free from manufacturing defect for the life of the product. Warranty does not cover abuse.

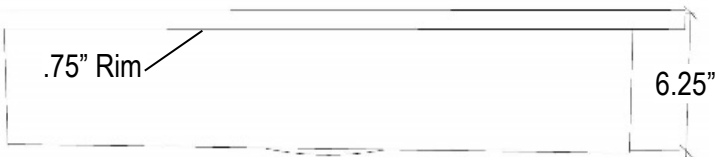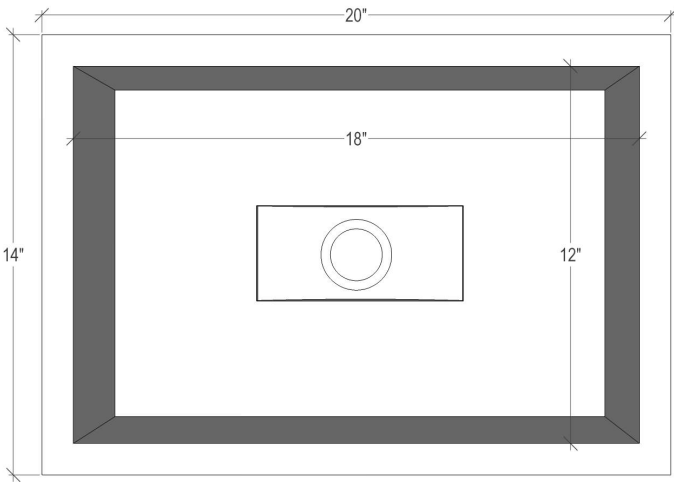

DIMENSIONS WILL VARY

DO NOT use this sheet as a guide for countertop cuts. Due to the handmade nature of each product, templates are not provided.